

APPROVED IN ACCORDANCE WITH THE EUROPEAN STANDARD 94/9/CE - ATEX



These intrinsically safe barriers allow to repeat in a safe area a potentiometric signal located in a hazardous area.
 Certificate N° TUV 99.ATEX.1405 II 1G Exia IIC T4
 These devices provide a complete galvanic isolation between the two areas under control.




GENERAL FEATURES

- Single measuring channel.
- LED operating indicator.
- Analog output.
- 35 mm DIN bar mounting.

TECHNICAL DATA Tab.1

Description	Technical data	Code
Type	Active barrier	A
Hazardous area – Safety grade	II 1G Exia IIC T4	-
Signal input	N. 1 potentiometric channel 800Ω - 20KΩ - Max. cable 50Ω	POT
Power to sensor in hazardous area	5 Volt U _o ≤ 13,8V - I _o ≤ 35mA - P _o ≤ 121mW	-
Safe area output	0 ÷ 10 V Load > 500Ω	0/10
Linearity	< 0,2% F.S.	-
Precision	< 0,2% F.S.	-
Temperature coefficient	< 0,02% K°	-
Operating indicators	Green LED Power supply On	-
Power supply	19 ÷ 29 Vdc	24D
Power consumption	1,8W max.	-
Electrical insulation	250Vac – 250 Vdc	-
Working temperature	-20°C ÷ +60°C	-
Degree of protection	IP20	-
Terminal board	≤ 2,5 mm ²	-
Mounting	35 mm.DIN bar	-
Dimensions	104 x 110 x 18 mm - Weight 125g	-

WIRING

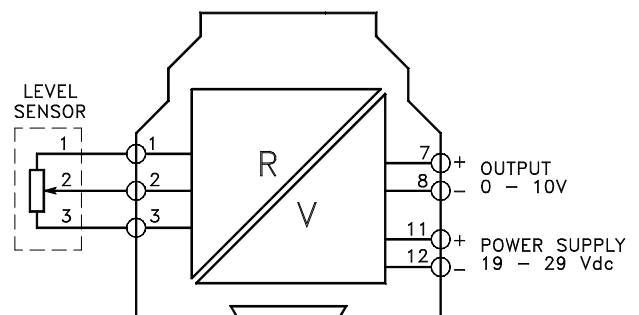

NOMENCLATURE

BARRIERA	A	POT	0/10	24D	Name
•					Tab.1 A = Active
	•				Tab.1 Type of input
		•			Tab.1 Output signal
			•		Tab.1 Power supply
				•	Tab.1